



Job	Type
-----	------

Dimensions



A	B	C
22.6"	20.5"	20.7"
574 mm	521 mm	526 mm

Specifications



NOTE: GYMLITER shown with optional WG-23 wire guard.

Housing



- Die cast aluminum socket housing
- Lektrocote® polyester powder paint finish
- Isolated wiring chamber
- Hubbell Gard® treated hardware
- Pendant mounting (pendant by others)

Optic

- Vertical base-up mounted lamp
- Anodal® finished parabolic reflector
- Silicone gasketing
- Lamp support
- Stainless steel lens ring
- Stainless steel hinge
- Four-point latching

Special Features

- 100% factory electrically tested
- Optic and housing shipped separately
- Remote ballast operation

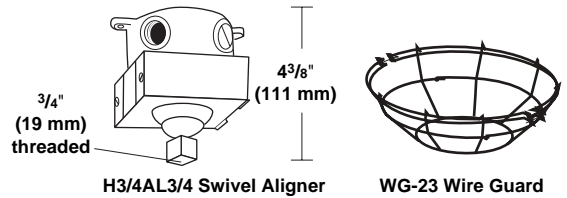
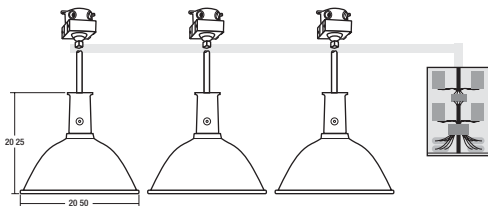


 NRTL/C


Ordering Information

Fixture Data	series	pendant mount	wattage	option
	SLS	GYM		

SERIES	WATTAGE	ACCESSORIES (order separately)
SLS Sportsliter	1000MH 1000 watt Metal Halide	WG-23 Wire Guard (field installed)
	1500MH 1500 watt Metal Halide	H3/4AL3/4 Swivel Aligner w/ box for thru wiring, all hubs tapped for 3/4" conduit, 25° swivel (CSA certified)
PENDANT MOUNT	OPTION	
GYM GYMLITER	P Phosphor Lamp, 1000W only	

NOTE: Lamp included.
 NOTE: GYMLITER used with remote ballasts.



Comments	
----------	---