


Job	Type
-----	------


Dimensions

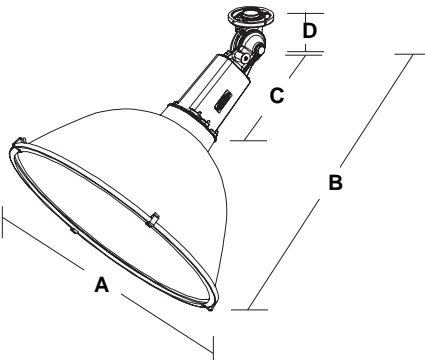

Remote Axial Optics

A	B	C	D
22.87"	20.63"	8.87"	2.94"
579 mm	524 mm	226 mm	75 mm

Optional V2 Visor



Specifications





 NRTL/C

Housing
Die cast aluminum socket housing. Factory aimed and pre-wired. Enclosed wiring. Silicone gasketing. Vertical aiming/repositioning memory. Labeled for easy reference. Lektrocote® polyester powder paint finish (gray).

Optics
Spun aluminum parabolic reflector. Four point latching. Stainless steel lens ring. Stainless steel door hinge. Silicone gasketing. Tempered clear glass lens. Lamp support standard. Labeled for easy reference. Pre-wired with quick connectors. 22 7/8" diameter maximum.

Installation
Each socket housing factory pre-wired to single plug connector. Factory aimed to computer generated points. Positioning pin for capturing aiming angle. Socket housing factory attached and aimed to crossarm assembly. Slotted hole system for easy optic alignment.

Special Features
Wind tunnel tested to 120 mph. 1g, 200,000 cycle vibration tested. Stainless steel and Hubbell Gard™ treated external hardware. UL 1598 listed and CSA NRTL/C certified. Mogul socket, 4kv pulse rated, 600v rated. 100% factory electrically tested. Designed as a system.

Ordering Information

<div style="background-color: gray; color: white; padding: 5px; font-weight: bold; display: inline-block;">Fixture Data</div>	series watt source beam dist. options	<table border="1" style="width:100%; border-collapse: collapse; font-size: 24px; font-weight: bold;"> <tr> <td style="width:25%;">SRR</td> <td style="width:25%;"></td> <td style="width:25%;"></td> <td style="width:25%;"></td> </tr> </table>	SRR															
SRR																		
SERIES	BEAM DISTRIBUTION	OPTIONS																
<table style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%; font-weight: bold;">SRR</td> <td>Solutions Remote Reflector</td> </tr> </table>	SRR	Solutions Remote Reflector	<table style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%; font-weight: bold;">2</td> <td>NEMA type 2</td> </tr> <tr> <td style="font-weight: bold;">3</td> <td>NEMA type 3</td> </tr> <tr> <td style="font-weight: bold;">4</td> <td>NEMA type 4</td> </tr> <tr> <td style="font-weight: bold;">5</td> <td>NEMA type 5</td> </tr> <tr> <td style="font-weight: bold;">6</td> <td>NEMA type 6</td> </tr> </table>	2	NEMA type 2	3	NEMA type 3	4	NEMA type 4	5	NEMA type 5	6	NEMA type 6	<table style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%; font-weight: bold;">PH</td> <td>Protective Hull</td> </tr> <tr> <td style="font-weight: bold;">V2¹</td> <td>12" External Visor</td> </tr> </table>	PH	Protective Hull	V2 ¹	12" External Visor
SRR	Solutions Remote Reflector																	
2	NEMA type 2																	
3	NEMA type 3																	
4	NEMA type 4																	
5	NEMA type 5																	
6	NEMA type 6																	
PH	Protective Hull																	
V2 ¹	12" External Visor																	
WATT	SOURCE																	
<table style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%; font-weight: bold;">1000</td> <td>1000W</td> </tr> <tr> <td style="font-weight: bold;">1500</td> <td>1500W</td> </tr> </table>	1000	1000W	1500	1500W	<table style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%; font-weight: bold;">H</td> <td>Metal Halide</td> </tr> </table>	H	Metal Halide											
1000	1000W																	
1500	1500W																	
H	Metal Halide																	
1. Shipped separately.																		

Comments	
----------	---