



Job	Type
-----	------

Dimensions



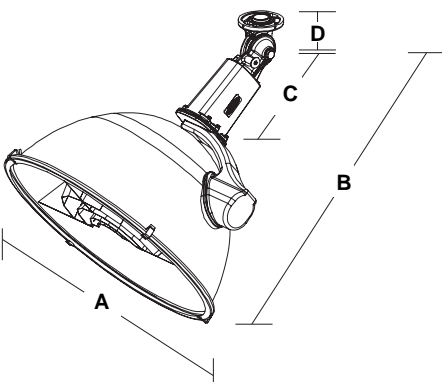


A	B	C	D
22.87"	21.75"	8.87"	2.94"
579 mm	554 mm	226 mm	75 mm

Optional V2 Visor



Specifications





 NRTL/C

Housing
Die cast aluminum socket housing. Factory aimed and pre-wired. Enclosed wiring. Silicone gasketing. Vertical aiming/repositioning memory. Labeled for easy reference. Pre-wired with quick connectors.

Optics
Internal faceted louvers. Horizontal mounted lamp. Uses standard BT-56 lamps. Finished spun aluminum parabolic reflector. Four point latching. Stainless steel lens ring. Stainless steel door hinge. Silicone gasketing. Tempered clear glass lens. Lamp support standard. Pre-wired with quick connectors. 22 7/8" diameter maximum.

Installation
Each socket housing factory pre-wired to single plug connector. Factory aimed to computer generated points. Positioning pin for capturing aiming angles. Socket housing factory attached and aimed to crossarm assembly. Labeled for easy reference.

Special Features
Wind tunnel tested to 120 mph. 1g, 200,000 cycle vibration tested. Stainless steel and Hubbell Gard™ treated external hardware. UL 1598 listed and CSA NRTL certified. Mogul socket, 4kv pulse rated, 600v rated. 100% factory electrically tested. Designed as a system.

Ordering Information

<div style="background-color: black; color: white; padding: 2px; font-weight: bold; font-size: 0.8em;">Fixture Data</div>	series	watt	source	beam dist.	spill control	options
	SRR				SG	

SERIES	BEAM DISTRIBUTION	SPILL CONTROL
SRR Solutions Remote Reflector	N Narrow beam	SG Spill/Glare Control Louvers
WATT	M Medium beam	OPTIONS
1000 1000W	W Wide beam	PH Protective Hull
1500 1500W		V2 ¹ 12" External Visor
SOURCE		
H Metal Halide		

1. Shipped separately.

Comments	
----------	---------------------------------------------------------------------------------------